


LIGHTING FIXTURE SCHEDULE						
TYPE	MANUFACTURER/ CATALOG No.	VOLTS	No. LAMPS/ LAMP TYPE	FIXTURE WATTAGE	MOUNTING	DESCRIPTION
<div><div>A</div><div>119</div></div>	HOLOPHANE PX4HW 18000LM WD MVOLT 50K 80CRI UNH	120	LED 18,000 LUMENS	119	PENDANT	LED HIGH BAY, WIDE OPTIC, UNIVERSAL MOUNT. FIXTURE SHALL HAVE 0-10 DIMMER BALLAST.
<div><div>B</div><div>24</div></div>	FEH 148 4000LM IPACLL MD MVOLT 50K 80CRI	120	LED 4,000 LUMENS	24	SURFACE	ENCLOSURE CASKETEED LED FIXTURE WITH FIBERGLASS HOUSING. ACRYLIC, LOW PROFILE CLEAR LENS, AND STAINLESS STEEL LATCHES. UL LISTED FOR WET LOCATIONS
<div><div>C</div><div>30</div></div>	UTIMONIA TWLED200C50K	120	LED	30	WALL	OUTDOOR LED FIXTURE, TEMPERED GLASS LENS, DIE-CAST ALUMINUM HOUSING, UL LISTED FOR WET LOCATIONS, BRONZE FINISH
<div><div>D</div><div>0.02</div></div>	UTIMONIA LOW QUANTUM	120	LED	0.02	CEILING	RED EXIT SIGN
<div><div>E</div><div>-</div></div>	UTIMONIA LIGHTING TRACK LIGHT	120	LED	VARIES	WALL	LED TRACK LIGHTS PER PLANS (NUMBER OF HEADS SHALL VARY PER LENGTH SHOWN ON PLANS)
<div><div>F</div><div>42.6</div></div>	FOCAL POINT RECESSED LINEAR FIXTURE	120	LED 875 LUMENS	42.6	T-BAR	6 FT. LINEAR RECESSED LED FIXTURE
<div><div>G</div><div>-</div></div>	UTIMONIA LIGHTING PENDANT LIGHT	120	LED			
<div><div>H</div><div>19</div></div>	FOCAL POINT RECESSED ROUND DOWNLIGHT	120	LED 1,500 LUMENS	19	RECESSED	RECESSED ROUND DOWNLIGHT, ROUND OVERLAP TRIM.
<div><div>I</div><div>30</div></div>	UTIMONIA TWLED200C50K	120	LED	30	WALL	OUTDOOR LED FIXTURE, TEMPERED GLASS LENS, DIE-CAST ALUMINUM HOUSING, UL LISTED FOR WET LOCATIONS, BRONZE FINISH WITH PHOTOCELL
<div><div>J</div><div>31</div></div>	PRUDENTIAL P8022-LED35-50WASC-UNV-X1	120	LED 3,100 LUMENS	31	T-BAR	2 * 2' FIXTURE RECESSED IN T-BAR CEILING. 4000K LED COLOR, WHITE FRAME, WHITE ACRYLIC
<div><div>K</div><div>68</div></div>	CYCLONE LIGHTING, LUPA BECSSA-ANL-T4-P90-40K	120	LED 8,880 LUMENS	68	20 POLE	LED FIXTURE WITH ALUMINUM MOLD CAST SUPPORT ARM AND INTEGRATED WIRING DRIVER MODULE HOUSING, LIGHT ENGINE SHALL HAVE 80 HIGH-EFFICACY LEDS AND 100,000 HOURS OF LIFETIME, THO MAX 20% WITH HIGH-POWER FACTOR OF 90%, U.L. LISTED, DARK SKY FRIENDLY, IP66 RATED, PROVIDE 10 FT. POLE
<div><div>L</div><div>35</div></div>	CYCLONE LIGHTING, LUPA BECSSA-ANL-T4-P90-40K	120	LED 4,911 LUMENS	35	10 POLE	LED FIXTURE WITH ALUMINUM MOLD CAST SUPPORT ARM AND INTEGRATED WIRING DRIVER MODULE HOUSING, LIGHT ENGINE SHALL HAVE 80 HIGH-EFFICACY LEDS AND 100,000 HOURS OF LIFETIME, THO MAX 20% WITH HIGH-POWER FACTOR OF 90%, U.L. LISTED, DARK SKY FRIENDLY, IP66 RATED, PROVIDE 10 FT. POLE
<div><div>M</div><div>37</div></div>	CYCLONE LIGHTING TRW-P0F-T3-P30-4K	120	LED 2,083 LUMENS	37	WALL	LED WALLPACK FIXTURE WITH ALUMINUM HOUSING AND FROSTED PLAT GLASS LENS AND EPDM GASKET, LED DRIVER WITH THO MAX 20%, IP66 RATED.
<div><div>N</div><div>56.8</div></div>	FOCAL POINT 8 FT. RECESSED LINEAR FIXTURE	120	LED 1,000 LUMENS	56.8	T-BAR	4 FT. LINEAR RECESSED LED FIXTURE
<div><div>O</div><div>26</div></div>	FOCAL POINT CL4000LMSEMFVOLT	120-277	LED 4,000 LUMENS	26	WALL	48" STRIP LIGHT, WALL MOUNTED
<div><div>P</div><div>28.4</div></div>	FOCAL POINT 48" RECESSED LINEAR FIXTURE	120-277	LED 750 LUMENS	28.4	T-BAR	4 FT. LINEAR RECESSED LED FIXTURE
<div><div>Q</div><div>68</div></div>	CYCLONE LIGHTING, LUPA BECSSA-ANL-T4-P90-40K	120	LED 8,880 LUMENS	68	18' POLE	LED FIXTURE WITH ALUMINUM MOLD CAST SUPPORT ARM AND INTEGRATED WIRING DRIVER MODULE HOUSING, LIGHT ENGINE SHALL HAVE 80 HIGH-EFFICACY LEDS AND 100,000 HOURS OF LIFETIME, THO MAX 20% WITH HIGH-POWER FACTOR OF 90%, U.L. LISTED, DARK SKY FRIENDLY, IP66 RATED, PROVIDE 18 FT. POLE



Foot candle calculations at rear property line

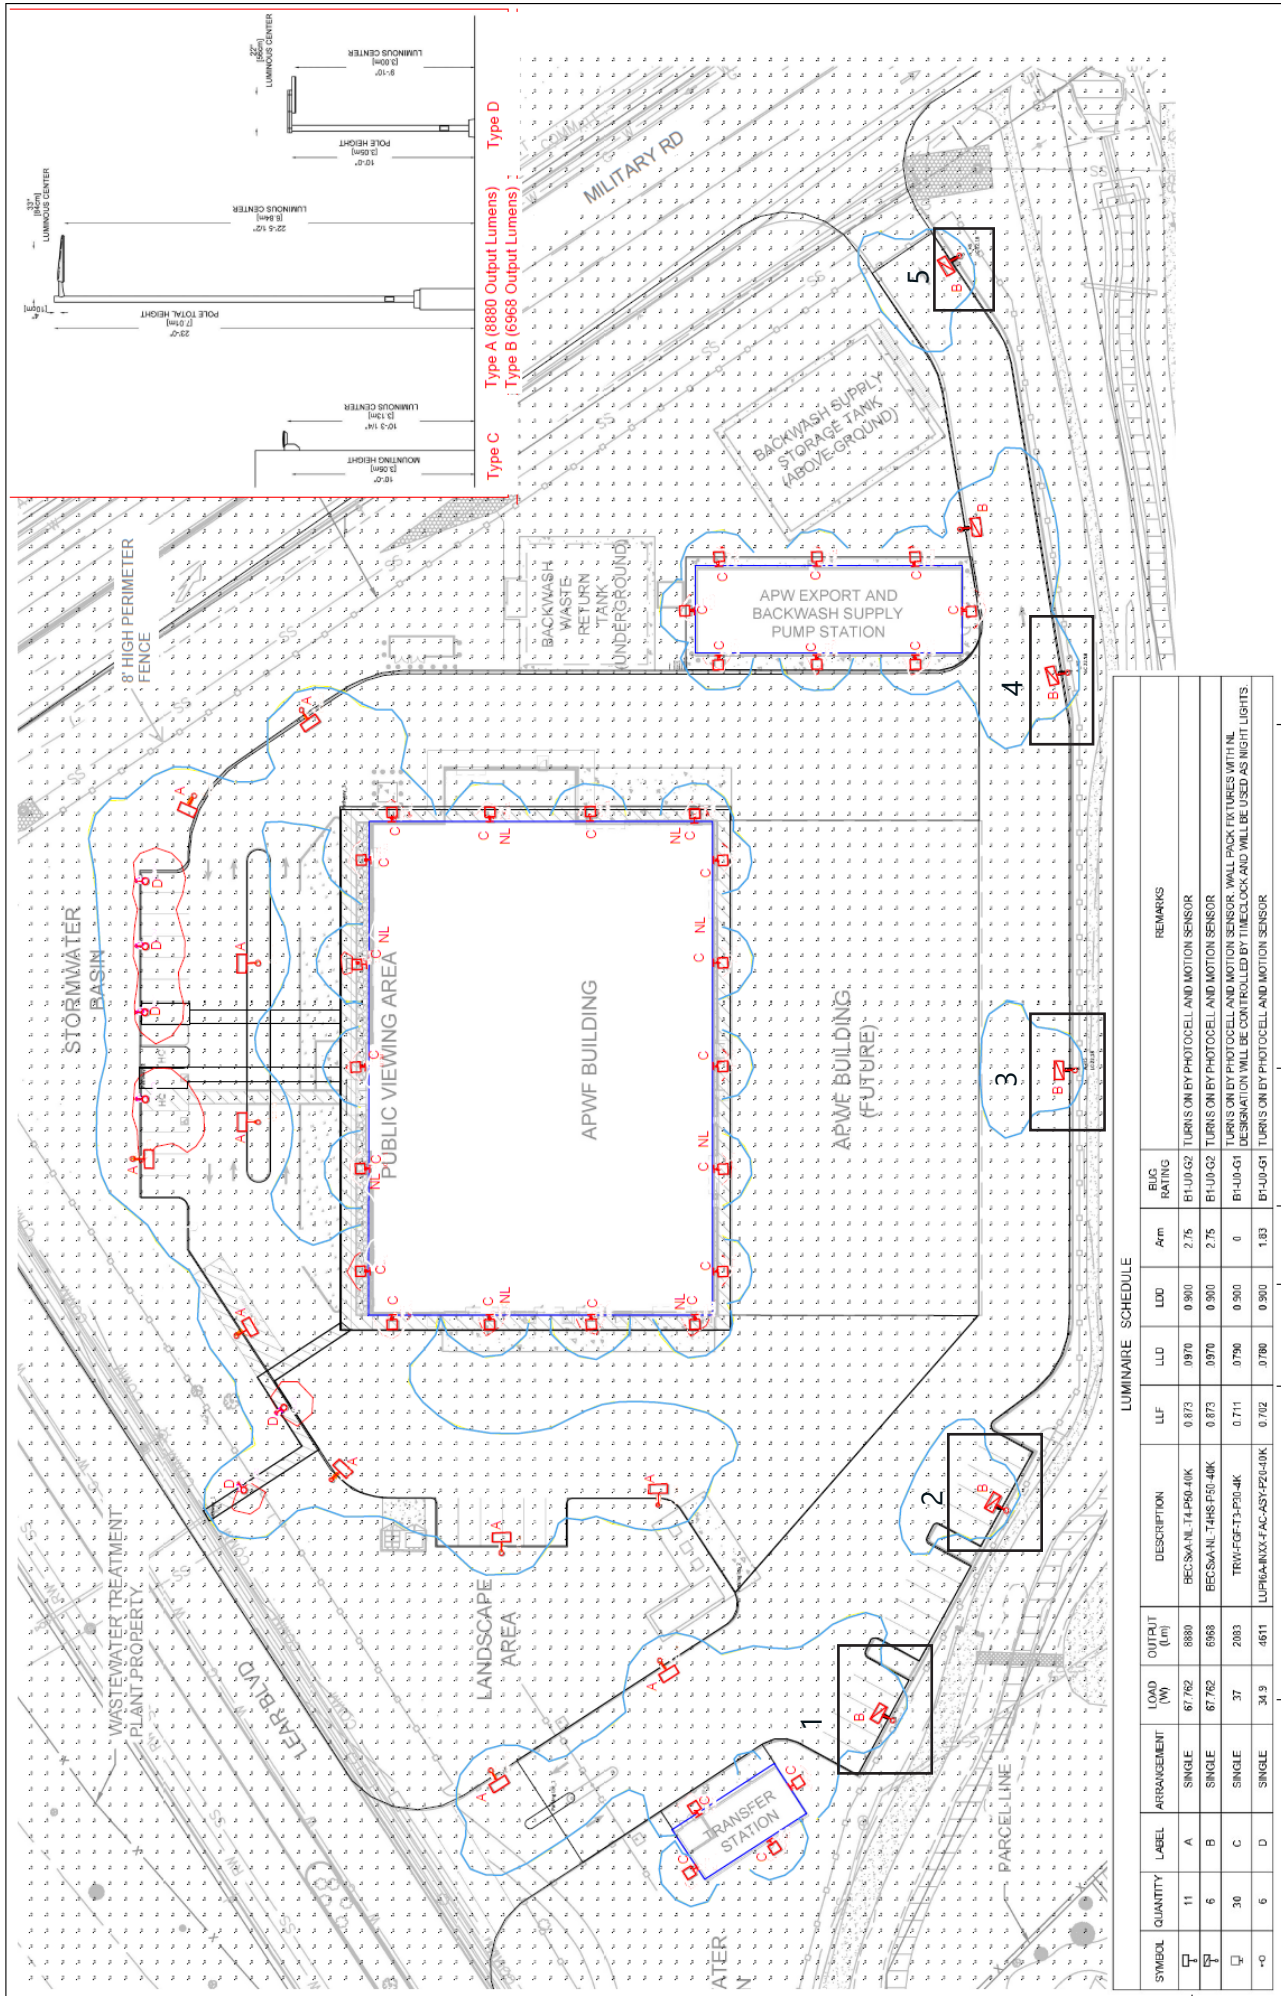